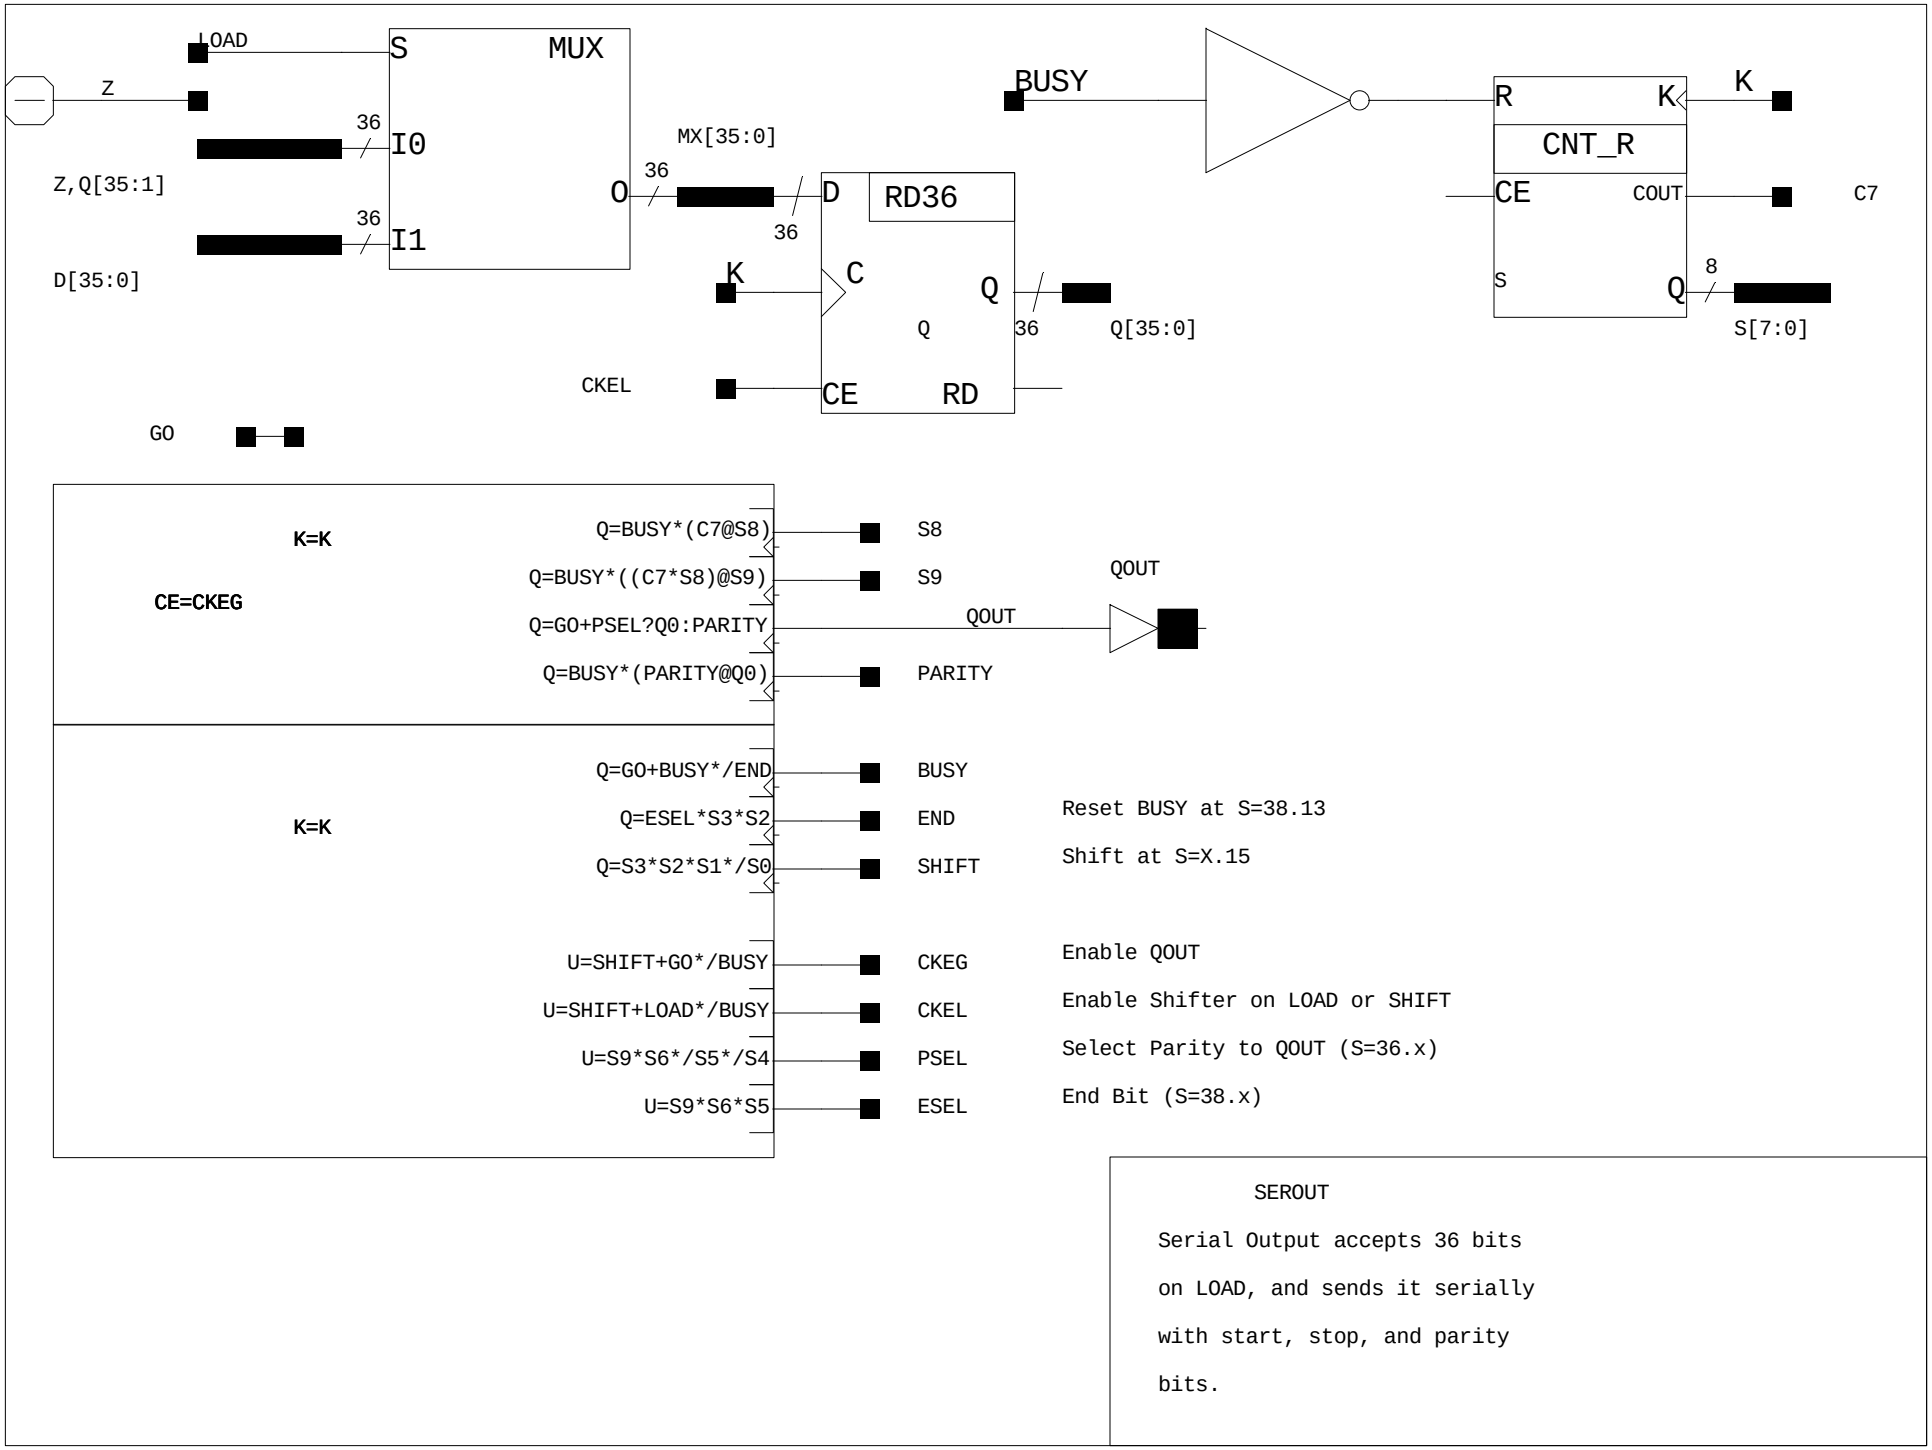

SEROUT

Serial Output accepts 36 bits on LOAD, and sends it serially with start, stop, and parity bits.